

# EXELL

## EXIPD50/2812R/30M

5 Megapixel IP Eyeball Dome Camera



### Key Features:

- 5 Megapixel @ 15fps(2592×1944)
- 2.8~12mm vari-focal lens
- WDR, Day/Night(ICR), DNR, AWB, AGC, BLC
- Up to 30m IR distance, Smart IR
- IP66
- ONVIF
- DC12V/POE

### SPECIFICATIONS


Model Number	EXIPD50/2812R/30M
Image Sensor	5 Megapixel CMOS
Effective Pixels	2592(H) X 1944(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3(4)s~1/30000s
Min. Illumination	0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Camera Features	
Max. IR LEDs Length	30m
Day/Night	Auto(ICR)/Color/B/W
Backlight Compensation	BLC / HLC / DWDR
White Balance	Auto/Manual
Gain Control	Auto/Manual
Noise Reduction	YES

(continued)

**Lens****Focal Length** 2.8~12mm**Max Aperture** F2.1(F2.0)**Focus Control** Manual**Video****Compression** H.264/ H.264H/ H.264B/ MJPEG**Resolution** 5MP (2592x1944)/4MP/3MP/2MP/720P**Frame Rate** Main Stream 5MP(1~15fps)

Sub Stream D1(1 ~ 25fps)

**Bit Rate** H.264: 36kbps ~ 10240kbps**Audio****Compression** N/A**Interface** N/A**Network****Ethernet** RJ-45 (10/100Base-T)**Wi-Fi** N/A**Protocol** IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS**Compatibility** ONVIF**Auxiliary Interface****Memory Slot** N/A**RS485** N/A**General****Power Supply** DC12V/PoE (802.3af)**Working Environment** -30°C~+60°C, Less than 95% RH**Ingress Protection** IP66**Vandal Resistance** N/A**Dimensions** Ø119mm × 97.4mm**Weight** 0.65Kg

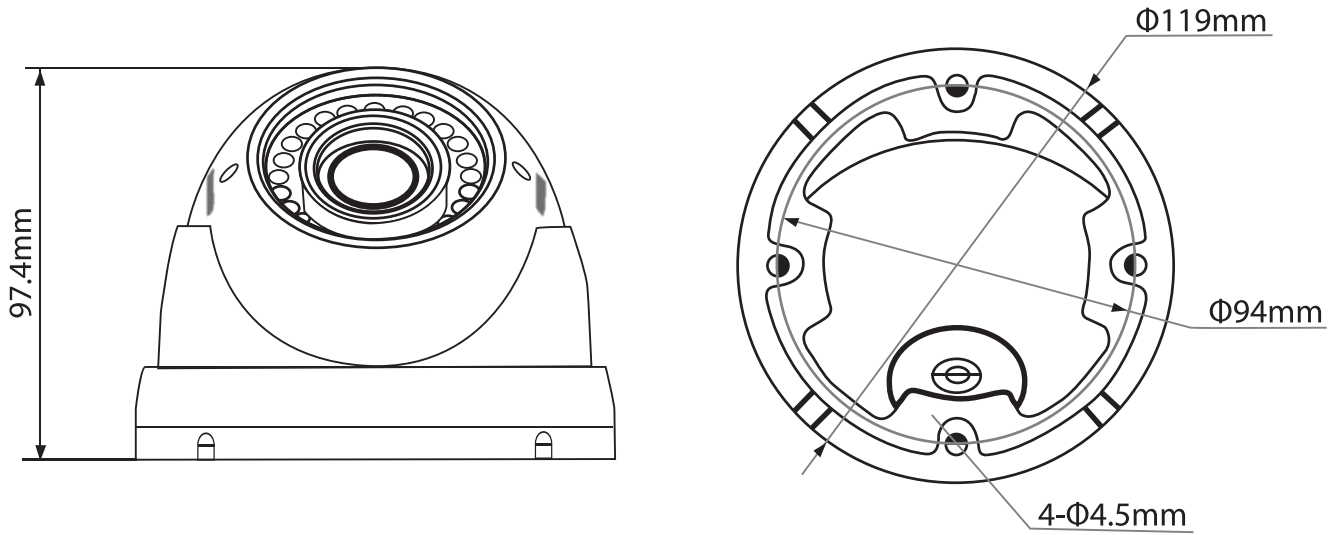

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved