

# SSAHD2B

AHD 2MP Stainless Steel Bullet Camera

**User Manual** 




### 1. Key Features

- 1/2.8" Sony Exmor CMOS image sensor
- Full HD Mega Pixel (1080P)
- · Auto Compensation and Long Range Transmission
- Stainless Steel Body (316 Grade)
- 3.6mm Megapixel Lens
- · Low Illumination Performance
- · 2 Pcs LED's
- True Day / Night with ICR Mechanism
- 3D DNR (Digital Noise Reduction)
- D-WDR (Digital Wide Dynamic)
- Simple Mode Change by OSD (AHD, CVBS)
- IP67
- DC12V

#### 2. Installation


STEP 1

Fix Bracket at desired place.




#### STEP 2

Adjust View Angle with 3-Axis Bracket.



### 3. Cable

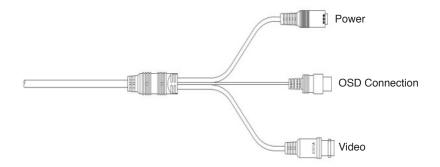


CAUTION! Please use regulated Power Supply DC12V, 500mA Reverse Polarity Protection

# 4. Technical Specification


	COALIDOD
Model Number	SSAHD2B
Image Sensor	1/2.8" Sony Exmor CMOS image sensor
Resolution	1080P, 720P/ NTSC/ PAL CVBS
Lens	3.6mm Mega Lens (ICR)
Scanning System	Progressive
Video Output	AHD, CVI, TVI and Analogue
S/N Ratio	More than 50dB (AGC Off)
Minimum Illumination	Colour: 1.0 Lux, B&W: 0.5 Lux Colour DSS: 0.002 Lux, B&W DSS: 0.0008 Lux
D-WDR	Off / 0~8
Sens-Up	Off / x2 - x30
Backlight	Off / BLC / HSBLC
DNR	Off / Low / Middle / High
Privacy Mask	4 Masks
Motion Detection	Off / On
Power Source	DC12V ±10%
Power Consumption	Max 4.0 Watt
Operating Temperature	-10°C to 50°C
Operating Humidity	10% to 85%
Dimensions (D x L x H)	58 x 126 x 104 mm
Weight	920g

All Specifications and Pictures are subject to change without notice.

## 5. Dimensions



## 6. Accessories




# 7. Mode Change

CVBS Mode: Push the left OSD Key for 3 seconds

AHD Mode: Push the right OSD key for 3 seconds

CVI Mode : Push the up OSD key for 5 seconds

TVI Mode: Push the down OSD key for 5 seconds





### GENIE CCTV LTD.

CCTV House, City Park, Watchmead, Welwyn Garden City, Hertfordshire, AL7 ILT Tel: +44 (0) 1707 330541 Fax: +44 (0) 1707 330543 www.geniecctv.com