

# Clarius®



## PRODUCT CODES

**VS-CW** Small Clarius PLUS White-Light Illuminator

### FEATURES

- Latest SMT LED technology
- Distances up to 81m (264')
- Low power consumption (15W)
- Long life
- 5 year warranty
- IP66 weather proof rating
- Built-in photocell WL on/off
- Photocell following contact
- Telemetry input for remote switching
- 12-32V DC / 24V AC +/- 10%
- CleanLITE®** self cleaning lens coating technology
- Angle 10°, 20°, 30°, 60°, 80° & 95°
- Elliptical beam profiles
- Pressure equalisation vent
- High quality anodised aluminium heatsink

### Small WL LED Illuminator

The **Clarius® Plus** range of high performance White-Light illuminators are designed to provide class leading performance, long life and ultra low maintenance.

Incorporating the latest surface mount LED's with enhanced optical output and outstanding reliability, they deliver excellent night-time images.

Each unit is fitted with integrated control circuitry to carefully control LED output, delivering consistent illumination and projected working life in excess of 10 years.

The **Clarius® Plus** range of illuminators includes a new interchangeable lens diffuser system; which allows the user to quickly and easily alter the angle of illumination. Elliptical beam profiles allow more light to be delivered where it is needed, allowing both longer distances and minimising light wastage. The system also helps to prevent overexposure of foreground objects.

As standard the illuminator includes interchangeable lensing to deliver 10° circular, 20°, 30°, 60°, 80° & 95° elliptical beam profiles.

Installation is quick and easy, requiring only a 12-32V DC / 24V AC +/- 10%.






### Recommended PSU

ALT-30-24



| Product Code | Angle            | Distance | FOV  |          |
|--------------|------------------|----------|------|----------|
| VS-CW        | 10° - Circular   | 81m      | 264' | 14m 46'  |
|              | 20° - Elliptical | 54m      | 176' | 19m 62'  |
|              | 30° - Elliptical | 47m      | 154' | 25m 83'  |
|              | 60° - Elliptical | 34m      | 110' | 39m 127' |
|              | 80° - Elliptical | 27m      | 88'  | 45m 148' |
|              | 95° - Elliptical | 20m      | 66'  | 44m 144' |

## TECHNICAL SPECIFICATIONS

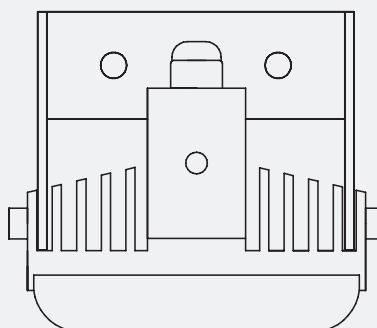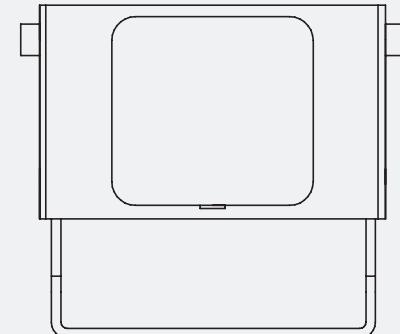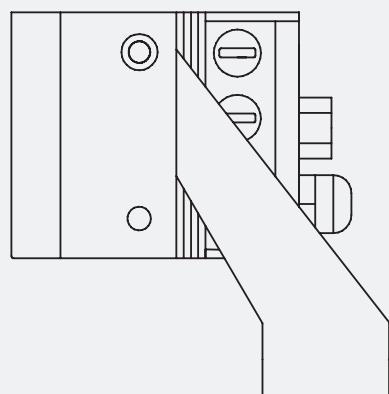

### GENERAL

#### Electronics

High Efficiency Surface Mount High Power LED's With Advanced Current Limited Integral Control Circuitry

Robust High Quality Aluminium Extrusion Polycarbonate High Transmission Protective (Vandal Proof) with **CleanLITE®** Technology

Black Anodised

3m (9ft) Including Photocell Following Contact & Remote Telemetry Input

Prevents Thermal Expansion & Pressure Cycling

Adjustable 20 -70 Lux

Adjustable 10% - 100%

-50° to 50°C (-58° to 122°F)

750g (1.6lbs)

Powder Coated Stainless Steel Wall Mount

68 x 110 x 78mm (2.68" x 4.33" x 3.07")

### ELECTRICAL

#### Input Voltage

12-32V DC or 24V AC +/- 10%

#### Input Current

0.6A at 24V AC

#### Consumption

15W

### LIGHTING OUTPUT

#### Lumen Output

928lm

#### Wavelength

Visible Spectrum (400-750nm)

#### Colour Temperature

6500k

#### Colour Rendering Index

74-80+

### CERTIFICATION

#### Safety

EN60598:2004 Electrical Safety

EN60825-1 Laser Eye Safety

IP66 In Accordance With EN60529;1992

EN61000, FCC Part 15. 107

15. 108 Class B

Waste Electrical & Electronic Equipment European Directive 202/96/EC

Restriction Of Hazardous Substance European Directive 202/95/EC

