




TECHNICAL IMAGE



PACKAGING INFORMATION

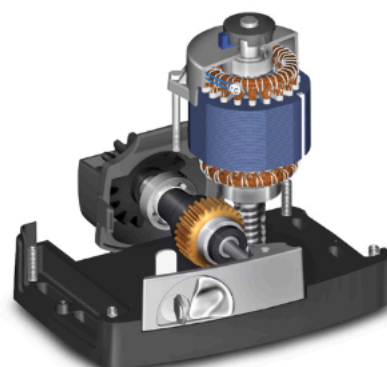


Size in cm: Length: 35 - Width: 23 - Height: 35.5

Code	Description	Pcs/pallet
BM30/304/HS	Electromechanical HIGH SPEED BRUSHLESS motor, low voltage, super intensive use, irreversible, ideal for sliding gates up to 400 kg. with built-in digital controller B70 series, magnetic limit switch.	44

Product technical specifications	BM30/304/HS
Max gate weight	400 kg
Power line supply	230V AC - 50Hz
Motor power supply	24V
Power rating	125W
Max thrust	350N
Operating temperature	-20+55°C
Protection level	IP43
Manoeuvre speed	24 m/min (0.44 m/s)
Reductor Type	Irreversible
Limit switch	Magnetic
Onboard control unit	B70/1DC
Operating cycles per day (opening/closing - 24 hours no stop)	500
Maximum dimension product in mm	L250x 165x H290
Number items per pallet	44

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

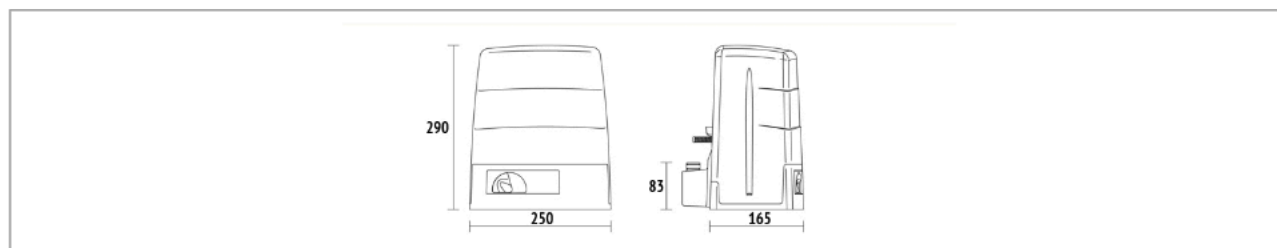


DIMENSIONS

PRODUCT ACCESSORIES



KT220
Raised fixing plate for
M30 series.




KT223
Fixing plate with stay
bolts and screws M30
series.



GA550
Galvanised steel rack
22x22x1000 module 4.




GA551
Galvanised steel rack
30x12x1000 module 4
with spacers and screws.



GA553
Nylon rack module 4 with
6 connectors L.1000.



GA554
Pocket of 6 spacers and
screws.



MC775
Kit magnetic limit switch
for control unit
H70/103AC, H70/104AC
and B70/1DC.



R99/C/001
Signboard Automatic
Opening".

