




TECHNICAL IMAGE



PACKAGING INFORMATION

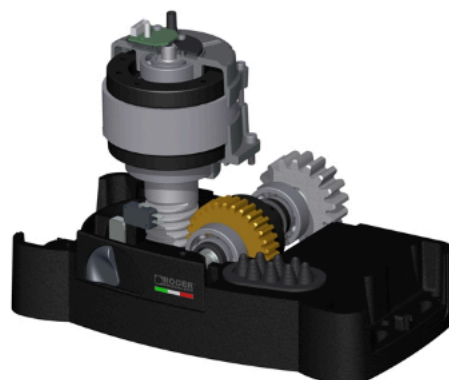


Size in cm: Length: 38 - Width: 13 - Height: 38.5


Code	Description	Pcs/pallet
BG30/1004/H S	Electromechanical HIGH SPEED BRUSHLESS motor, low voltage, super intensive use, with native encoder onboard, irreversible ideal for sliding gates up to 1000 Kg. with built-in digital controller B70 series, magnetic limit switch.	40

Product technical specifications	BG30/1004/HS
Max gate weight	1000 kg
Power line supply	230V AC - 50Hz
Motor power supply	36V
Power rating	590W
Frequency of use	intensive use
Max thrust	800N
Operating temperature	-20+55°C
Protection level	IP43
Manoeuvre speed	20 m/min (0.33 m/s)
Reductor Type	Irreversible
Limit switch	Magnetic
Onboard control unit	B70/1DCHP
Batteries recovery	Optional
Operating cycles per day (opening/closing - 24 hours no stop)	800
Maximum dimension product in mm	L346x W180x H362
Number items per pallet	40

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

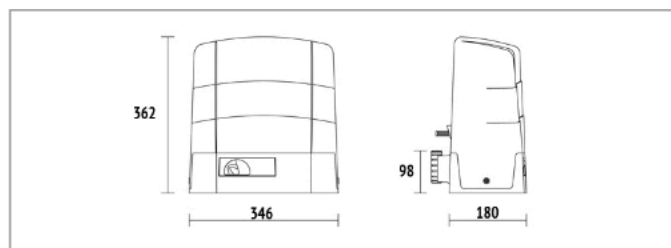


DIMENSIONS

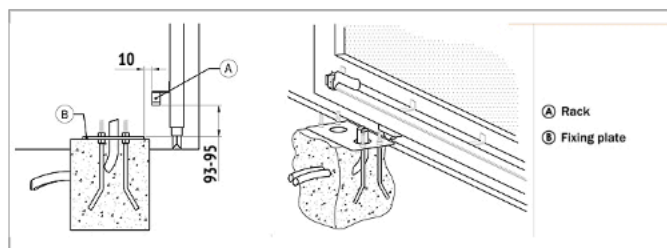

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



KT215

Fixing plate with stay bolts and screws G30 series.



KT222

Raised fixing plate for G30 series.




GA550

Galvanised steel rack 22x22x1000 module 4.



GA551

Galvanised steel rack 30x12x1000 module 4 with spacers and screws.



GA553

Nylon rack module 4 with 6 connectors L.1000.



GA554

Pocket of 6 spacers and screws.



LT328

Z17 mod. 4 Pinion with increased thickness H.38



MC775

Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.



R99/C/001

Signboard Automatic Opening".

