

# PRODUCT TECHNICAL DATASHEET


## R23/372



CODE	DESCRIPTION	PCS/PALLET
R23/372	Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 m of length. With mechanical limit switch. With short articulated arms.	48


PRODUCT TECHNICAL SPECIFICATIONS	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	50%
Torque	400 N m
Operating temperature	-20+55° C
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	1,5 Rpm
Opening time	14 s
Motor thermal protection	150° C
Incorporated condenser	10 µF
Limit switch	Microswitch in opening and closing
Encoder	-
Maximum dimension product in mm (L x W x H)	355 x 190 x 160
Product weight packed (Kg)	16,2
Number items per pallet/box	48

# PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

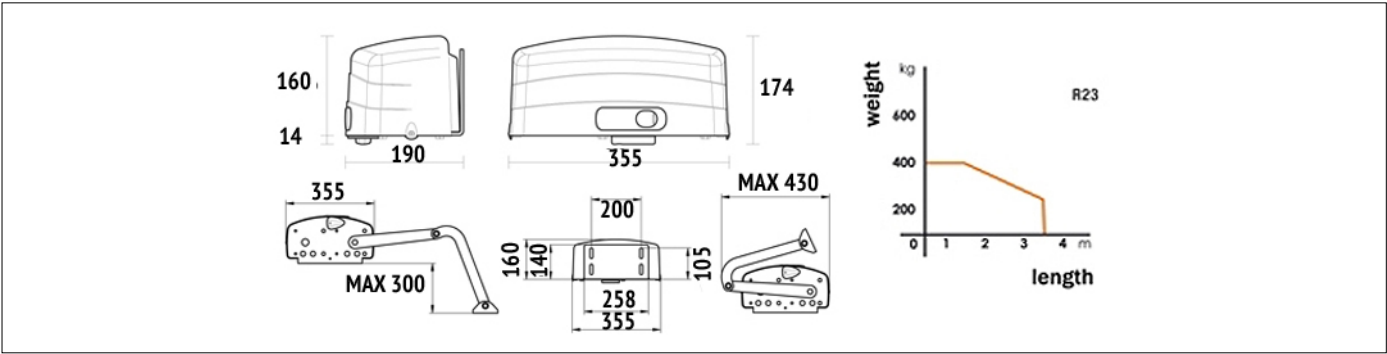

DIMENSIONS

# PRODUCT PREPARING FOR INSTALLATION

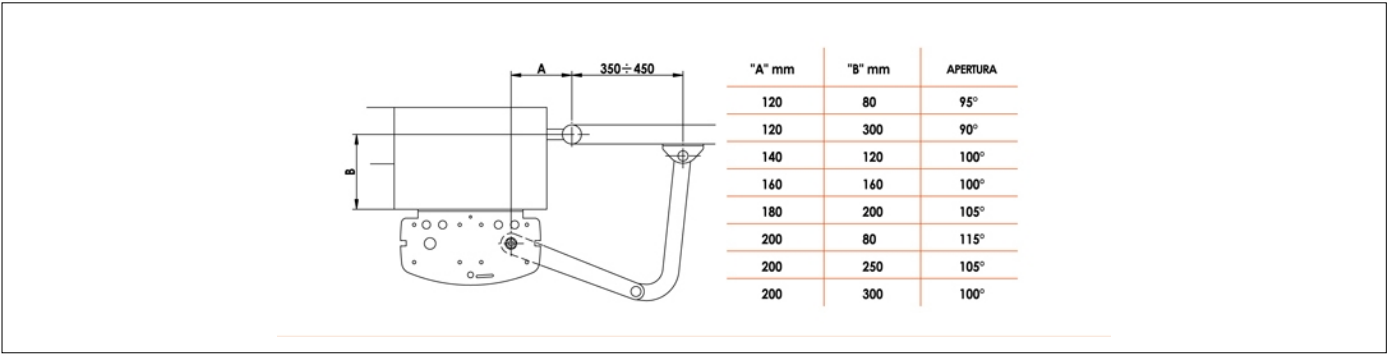

PREDISPOSITION FOR STANDARD INSTALLATION

# PRODUCT ACCESSORIES

**LT302**  
Arms short for articulated motor.

**LT338**  
Arms with articulated slide.

**KT218**  
Gate pull bracket for series articulated.

**KT208**  
Plate for fixing to post R23 series.

**R99/C/001AL**  
Signboard "Automatic Opening"  
Aluminium version.

**R99/C/001**  
Signboard "Automatic Opening".