


AGILIK TECHNICAL FEATURES



	Agilik 4	Agilik 6
Barriers	Up to 4 mt long	Up to 6 mt long
Frequency of use	Super intensive use	Super intensive use
Travel control system	Digital Encoder Absolute Encoder	Digital Encoder Absolute Encoder
Power supply	230V AC - 115V AC 50/60Hz +10%	230V AC - 115V AC 50/60Hz +10%
Motor power supply	From 0 to 36V DC	From 0 to 36V DC
Motor absorption	From 0 to 15A	From 0 to 15A
Motor power	200W	200W
Torque at the gear	From 0 to 200 Nm	From 0 to 300 Nm
Opening - closing time at 90°	2 ÷ 6 (sec)	4 ÷ 8 (sec)
Operating temperature	-20 + 55 C°	-20 + 55 C°
Accessories power supply	24V DC	24V DC
Control unit (built-in)	Digital Controller 36V DC	Digital Controller 36V DC
Release system	European Key cylinder	European Key cylinder
Batteries recovery	Available (optional)	Available (optional)

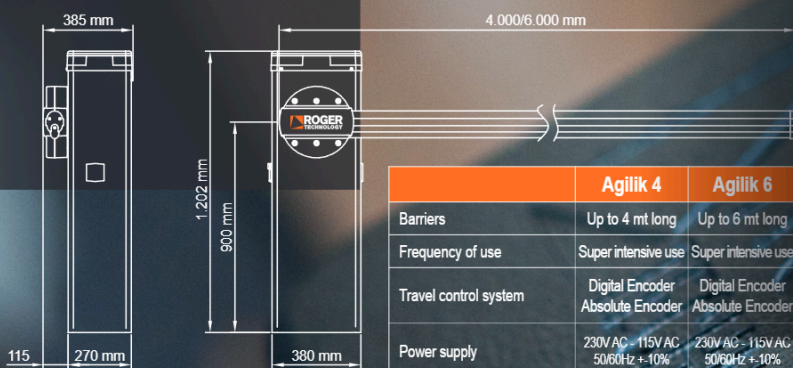

ROGER TECHNOLOGY
Via S. Botticelli, 8 - 31021, Bonisolo di Mogliano Veneto (TV)
T. +39 041 5937023 - F. +39 041 5937024
info@rogertechnology.it - www.rogertechnology.com


AGILIK: THE AUTOMATIC DIGITAL BARRIER

Strong but elegant with a modern design and above all else with our new innovative digital **Brushless** motor. This is the new **Agilik**, the new automatic barrier designed and fully manufactured in the Italian factories of **Roger Technology**. This unique barrier is suitable for all professional installations in the residential, commercial and industrial sectors. The **Agilik** represents the first automatic barrier with digital processing due to its **Brushless** motor 36V with permanent magnetic field. The position of the beam is continually monitored in all positions with its absolute encoder. The revolutionary three-phase **Brushless** motor allows unlimited use of the barrier and has ultra low power consumption. The efficient motor guarantees very intensive use due to the gears with helicoidal and angled teeth.



NEW ELECTRONIC BOARD WITH BRUSHLESS CONTROL

The new **Brushless** control panel represents the new generation of electronic boards, designed to manage all types of safety whilst monitoring the movement of the barrier. Without a traditional relay and due to the revolutionary Mosfet System, the new sinusoidal **Brushless** controller 36V DC with field-orientated sensory control will detect obstacles instantly. It will allow for instant inversion, manage the speed control, slowdown and impact force whilst analysing the consumption, rpm and the absorption of the motor during its operation. The advanced absolute encoder installed in the slow shaft of the motor allows for the return to normal functions of the barrier without repeating the re-learning process in the case of power failure or manual release.

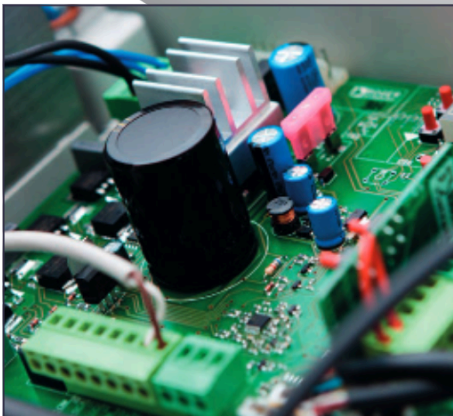

STURDY STRUCTURE



All the materials used, steel and bronze are of exceptional prime quality ensuring the automation is strong, robust and very stable during its operation.

LED LIGHTING



Elegant LED flash in four corners of the control unit.

ELLIPTICAL ARM




Aluminium arm with windproof elliptical section and centre rib, designed to be even more stable and robust. LED lights signal are integrated and configurable from the control unit.

PROTECTION COVER



Double protection pressure die-cast in different colors to the gearbox produced by Roger Technology.

PERFECT GEARS



The motor and all of the gears are produced and manufactured in the Roger Technology factories. They are rigorously tested and manufactured in steel and bronze with helicoidal teeth which are angled at 15 degrees to ensure perfect movement during operation.

TOTAL CONTROL IN GRADES



The angle of the beam is controlled by the control unit in digital mode in tenths, the gradual installation, operation and maintenance.

BALANCING SYSTEM AND SPRING



Springs are available in different types according to the length of the arm and are certified for millions of operations. The mechanical balancing system is enhanced by the use of adjustable mechanical stops.

BRUSHLESS 36V



Revolutionary and efficient. The Brushless motor's permanent magnetic field allows for intensive use of ultra low power.

