

PRODUCT TECHNICAL DATASHEET


R23/372



CODE	DESCRIPTION	PCS/PALLET
R23/372	Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 m of length. With mechanical limit switch. With short articulated arms.	48


PRODUCT TECHNICAL SPECIFICATIONS	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	50%
Torque	400 N m
Operating temperature	-20+55° C
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	1,5 Rpm
Opening time	14 s
Motor thermal protection	150° C
Incorporated condenser	10 µF
Limit switch	Microswitch in opening and closing
Encoder	-
Maximum dimension product in mm (L x W x H)	355 x 190 x 160
Product weight packed (Kg)	16,2
Number items per pallet/box	48

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

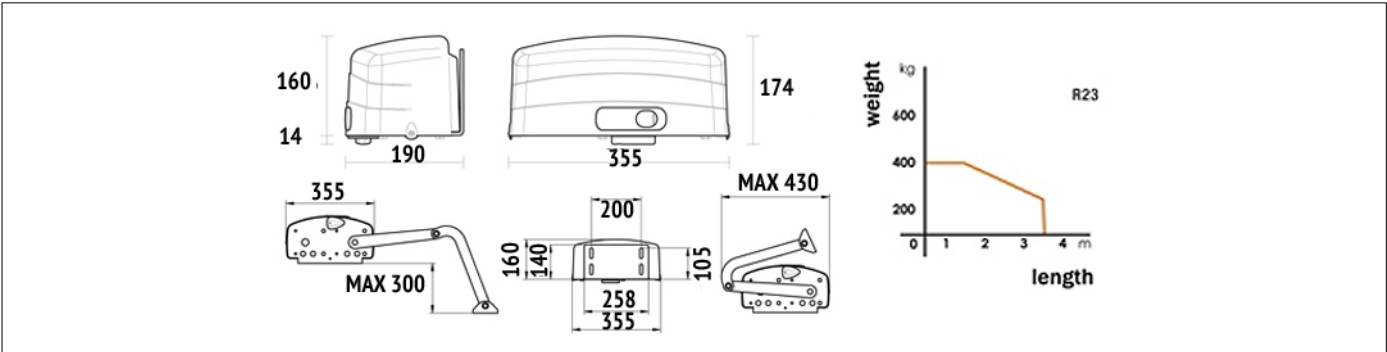

DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

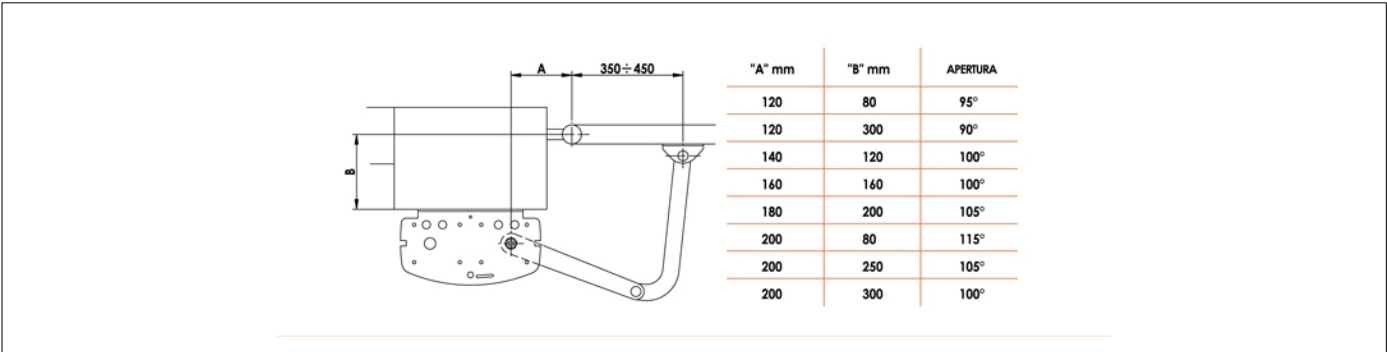

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES

LT302
Arms short for articulated motor.

LT338
Arms with articulated slide.

KT218
Gate pull bracket for series articulated.

KT208
Plate for fixing to post R23 series.

R99/C/001AL
Signboard "Automatic Opening"
Aluminium version.

R99/C/001
Signboard "Automatic Opening".